


THE 25FX

State-of-the-art power for sport or competition

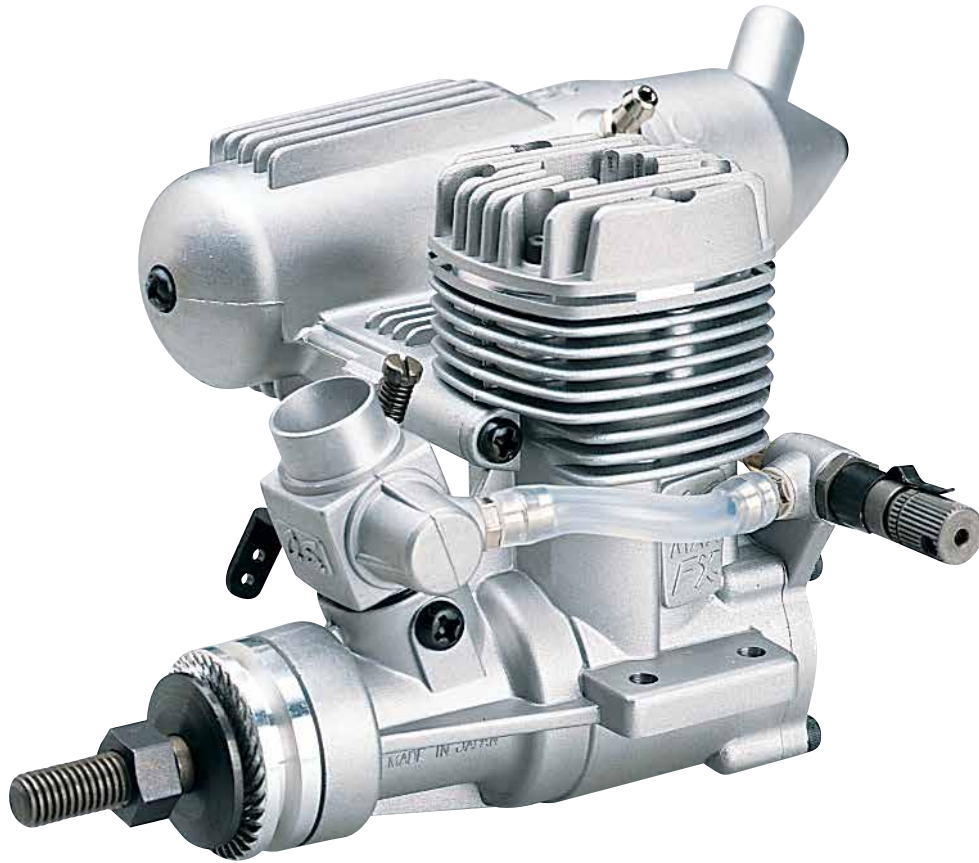

Like all FX Series engines, the 25FX features dual bearings for durability and smooth operation, plus a low crankcase profile—a refinement that increases cooling fin area and improves heat dispersion. Plus, you'll never worry about losing a prop during flight — the threaded portion of FX crankshafts are extra-long to promote better engagement of the prop, nut and spinner and greater flight safety.

- Remote needle valve
- Longer crankshaft provides more secure attachment for the spinner, prop and nut
- Dual bearing construction adds durability and longevity
- Semi-square head shape creates more fin area to increase cooling capacity
- Includes high-performance carburetor and muffler with adjustable exhaust direction and a built-in pressure tap

OSMG0525

Displacement: 0.2485 cu in (4.07 cc)

Bore: 0.708 in (18 mm)

Stroke: 0.630 in (16 mm)

Rpm Range: 2,500-19,000

Output: 0.84 hp @ 18,000 rpm

Weight w/Muffler: 10.8 oz (306 g)

Includes: expansion-style muffler, #8 Plug

Recommended Props: 9x5, 9x5.5, 9x6, 10x4, 10x5

Recommended Products:

OSMG2690	O.S. #6 A3 Glow Plug (Hot)
TOPQ5075	Top Flite 10x4 Power Point Propeller
GPMQ4150	Great Planes Ultra Precision Fuel Filter

Recommended Options:

OSMG2750	O.S. 25FX Engine Mount
GMPM3001	Great Planes After-Run Engine Oil



O.S. ENGINE
UNEQUALLED QUALITY PRECISION & PERFORMANCE
osengines.com